

Coaxial

Precision Fixed Attenuator

50Ω 1W 20dB DC to 2000 MHz

HAT-30+ HAT-30



CASE STYLE: FF747

Connectors	Model	Price	Qty.
BNC Male-BNC Female	HAT-30(+)	9.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-45°C to 100°C
Storage Temperature	-55°C to 100°C


Features

- excellent VSWR, 1.05:1 typ.
- excellent flatness, 0.80 dB typ. to 2000 MHz
- usable to 4000 MHz

Applications

- PCS
- instrumentation
- cellular

Outline Drawing

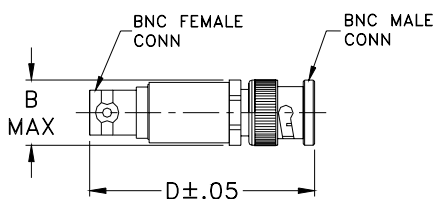

Outline Dimensions (inch/mm)

B	D	wt
.62	1.94	grams
15.75	49.28	30.0



Electrical Specifications

FREQ. RANGE (MHz)	ATTENUATION (dB)					VSWR (:1)			MAX. INPUT POWER (W)
	Flatness*					DC-0.5 GHz	DC-1 GHz	DC-2 GHz	
	DC-0.5 GHz	DC-1 GHz	DC-2 GHz	Total Band Max.	DC-0.5 GHz				
f_L - f_U	Nom.	Typ.	Typ.	Typ.		Typ.	Typ.	Typ.	
DC-2000	30±0.2	0.30	0.60	0.80	1.30	1.05	1.10	1.15	1.0

* Flatness = variation over band divided by 2.

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
10.00	29.98	1.00
50.00	29.98	1.00
100.00	30.00	1.01
250.00	29.97	1.01
500.00	29.80	1.01
750.00	29.69	1.03
1000.00	29.74	1.04
1500.00	29.86	1.08
1750.00	30.02	1.09
2000.00	30.17	1.11

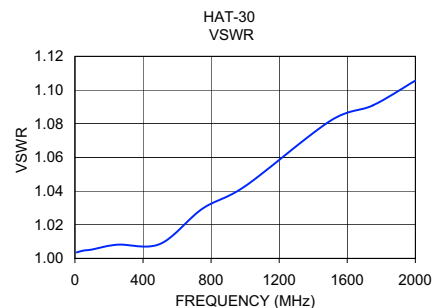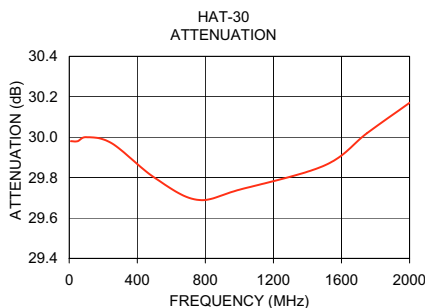

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-HAT	5	1 of ea. HAT-3(+),6(+),10(+),20(+),30(+)	48.95
K2-HAT	10	1 of ea. HAT-1(+),2(+),3(+),4(+),5(+),6(+),7(+),8(+),9(+),10(+)	98.95



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. E
M98898
EDR-5087/1-15
HAT-30
RVN/LC/CP/AM
060817
Page 1 of 1