

Coaxial

Precision Fixed Attenuator

50Ω 1W 6dB DC to 2000 MHz

HAT-6+
HAT-6



CASE STYLE: FF747

Connectors	Model	Price	Qty.
BNC Male-BNC Female	HAT-6(+)	9.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-45°C to 100°C
Storage Temperature	-55°C to 100°C


Features

- excellent VSWR, 1.05:1 typ.
- excellent flatness, 0.15 dB typ. to 2000 MHz
- usable to 4000 MHz

Applications

- PCS
- instrumentation
- cellular

Outline Drawing

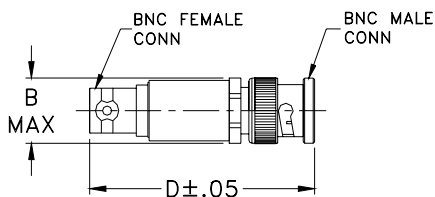

Outline Dimensions (inch/mm)

B	D	wt
.62	1.94	grams
15.75	49.28	30.0



Electrical Specifications

FREQ. RANGE (MHz)	ATTENUATION (dB)					VSWR (:1)			MAX. INPUT POWER (W)
	Flatness*					DC-0.5 GHz	DC-1 GHz	DC-2 GHz	
	DC-0.5 GHz	DC-1 GHz	DC-2 GHz	Total Band Max.	DC-0.5 GHz				
f_L - f_U	Nom.	Typ.	Typ.	Typ.		Typ.	Typ.	Typ.	
DC-2000	6±0.2	0.05	0.10	0.15	0.25	1.05	1.10	1.10	1.0

* Flatness = variation over band divided by 2.

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
10.00	6.00	1.00
50.00	6.01	1.00
100.00	6.01	1.01
250.00	6.04	1.02
500.00	6.06	1.04
750.00	6.08	1.05
1000.00	6.12	1.06
1500.00	6.16	1.07
1750.00	6.18	1.06
2000.00	6.20	1.05

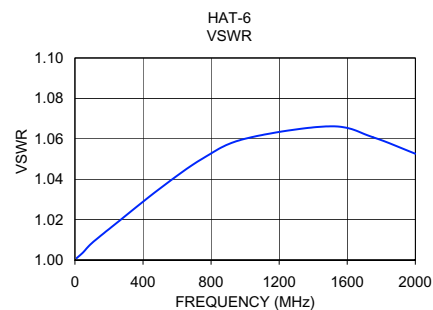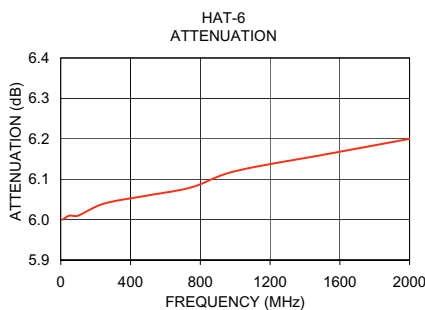

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. E
M98898
EDR-5087/1-15
HAT-6
RVN/LC/CP/AM
070302